




Electrical Conductive Copper Foil Shielding Tape 50mm Width

Our Product Introduction

Basic Information

- Place of Origin: china
- Brand Name: Jinshunlai
- Certification: IOS
- Model Number: 0.1mm-900mm
- Minimum Order Quantity: 1kg
- Price: 5000usd
- Delivery Time: 5day
- Payment Terms: L/C, T/T , Western Union,D/P
- Supply Ability: 90000ton

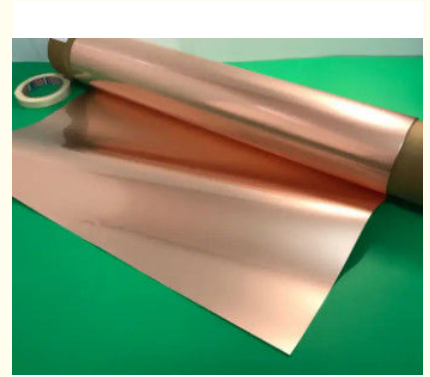

Product Specification

- Adhesive: Acrylic
- Adhesive Strength: High
- Application: Electrical, Insulation, Shielding
- Color: Copper
- Temperature Resistance: Up To 80°C
- Thickness: 0.06mm
- Width: 50mm
- Color: Red Yellow
- Highlight: Electrical conductive copper foil, conductive copper foil Tape, 50mm conductive copper shielding tape



More Images



for more products please visit us on copper-solid.com

Product Description

Key attributes


Industry-specific attributes

Adhesive	Acrylic
Adhesive Side	Double Sided
Adhesive Type	Pressure Sensitive
Design Printing	No printing
Material	copper foil
Feature	ANTISTATIC
Use	Warning

Other attributes

Place of Origin	China
Brand Name	jinshunlai
Model Number	CU
key word	high temperature resistance tape

Packaging & delivery

Selling Units:	Single item 
Single package size:	12X12X5 cm
Single gross weight:	0.200 kg
Package Type:	carton

Product Description

Conductive copper foil tape has low surface oxygen properties and can be attached to a variety of different substrates, such as metals, insulating materials, etc., with a wide temperature range.

It has strong bonding force, good electrical conductivity, eliminates electromagnetic interference (EMI) and isolates electromagnetic waves from harming the human body, avoiding the influence of unwanted voltage and current on function. In addition, it has a good effect on the static battery after grounding.

Mainly used in electromagnetic shielding and anti-static, the conductive copper foil is placed on the substrate surface, combined with the metal substrate, has excellent conductivity, and provides electromagnetic shielding effect.

Can be divided into: self-adhesive copper foil, double-lead copper foil tape, single-sided conductive copper foil / double-sided double-lead copper foil.

Detailed Images

parameter	single face with glue					double sided adhesive	
copper foil thickness (mm)	9U±1	18U±2	25U±3	50U±3	100U±2	25U±1	50U±2
total thickness (mm)	20U±5	50U±2	60U±5	85U±5	150U±5	65U±5	120U±5
resistance (Ω)	≤0.05	≤0.05	≤0.05	≤0.05	≤0.05	≤0.05	≤0.05
180 stripping force KG/25mm	≥0.8	≥0.8	≥1.2	≥1.2	≥1.5	≥1.2	≥1.2
maintain force 1KG/25m m2 hours	≥48	≥48	≥48	≥48	≥48	≥48	≥48
long term temperature tolerance	80	80	80	80	80	80	80
short term temperature tolerance	120	120	120	120	120	120	120



Wuxi Jinnuo copper Co.,Ltd



+86-17763564398



sales01@shuangheyisteel.com



copper-solid.com

32 Chengnan Road, New District, Wuxi City, Jiangsu Province, China