



## Factory Supplier High Quality Solid Bare Copper Wire 0.1mm 0.2mm 0.3mm 0.4mm for cable

Our Product Introduction

### Basic Information

- Place of Origin: china
- Brand Name: Jinshunlai
- Certification: IOS AISI, ASTM, GB, EN
- Model Number: 0.1mm-900mm
- Minimum Order Quantity: 1kg
- Price: 5000usd
- Delivery Time: 5day
- Payment Terms: L/C, T/T , Western Union,D/P
- Supply Ability: 90000ton



### Product Specification

- Packaging Details: Waterproof Paper, Steel Strip Packed And Other Standard Export Seaworthy Package, Or Customized Package
- Temperature Rating: Varies
- Price: Contact Us
- Material: Copper
- Length: Varies
- Color: Red Yellow
- Place Of Origin: China
- Delivery Time: Within 7-10 Working Days
- Conductor: Single



### More Images



for more products please visit us on [copper-solid.com](http://copper-solid.com)

## Product Description

### Solid Bare Copper Wire

Place of Origin	Shandong, China
Brand Name	jinshunlai
Model Number	Solid
Type	Bare
Color	Copper color
Size	0.08mm~8.00mm
Application	control cable inner conductor
Conductor Material	Ccam
Conductor Type	Solid
Insulation Material	PVC

External Diameter: 3mm-800mm,Etc

Length: 500-12000mm Or Customization

Machining: Customization

\* All Products Are Customizable

### Solid Bare Copper Wire Description

We Sustained A Large Stock Solid Bare Copper Wire And Copper Rod.


Copper Rod Is A Kind Of Non-Ferrous Metal Processing Rod, Which Has Good Processing Performance And High Electrical Conductivity. Mainly Divided Into Brass Rods (Copper-Zinc Alloy, Less Expensive) And Copper Rods (Higher Copper Content).

Application Range: Air-Conditioning Pipes, Refrigerator Pipes, Oil Pipes, Water Supply Pipes And Various Mechanical Supporting Materials, Automobile Synchronizer Gear Rings, Marine Pumps, Valves, Structural Parts, Friction Accessories, Etc.

### Copper Rod Specification

External Diameter:	3mm-800mm,Etc	Length:	500-12000mm Or Customization
Machining:	Customization	Standard:	ASTM,AISI,JIS,GB, DIN,EN
Surface Finish	Mill,Polished,Bright,Oiled,Hair Line,Brush,Mirror,Sand Blast,Or As Required.		
Certification:	ISO, DFARS, REACH RoHS	Trade Terms	FOB,CRF,CIF,EXW All Acceptable
Loading Port	Any Port In China	Delivery Time	7-15 Working Days After The Receipt Of 30% Deposit
Copper	GB		
	T1,T2,T3,TU1,TU0,TU2,TP1,TP2,TAg0.1,		
	ASTM		
	C10100,C10200,C10300,C10400,C10500,C10700,C10800,C10910,C10920,		
	C10930,C10940,C11000,C11300,C11400,C11500,C11600,C12000,C12200,		
	C12300,C12500,C14200,C14420,C14500,C14510,C14520,C14530,C14700,		
	C15100,C15500,C16200,C16500,C17000,C17200,C17300,C17410,C17450,		
	C17460,C17500,C17510,C18700,C19010,C19025,C19200,C19210,C19400,		
	C19500,C19600,C19700,		
	JIS		
	C1011,C1020,C1100,C1201,C1220,C1221,C1401,C1700,C1720,C1990		

### Copper Rod Production Process

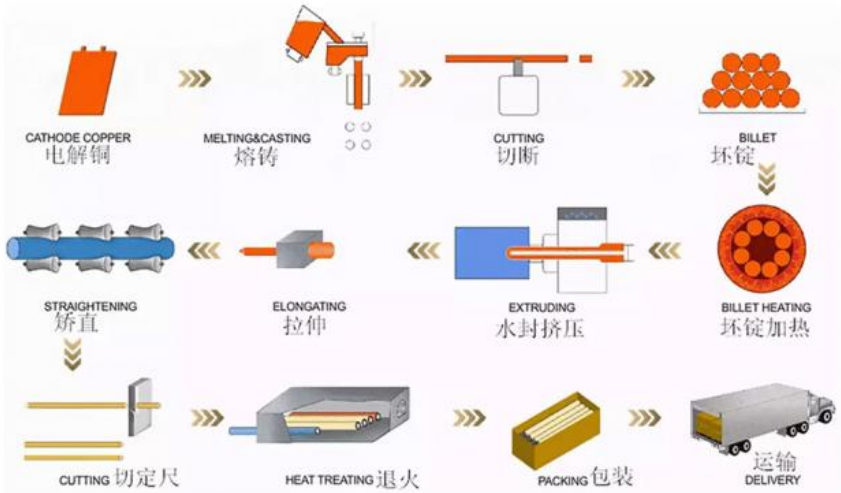

We Use High-Quality Raw Materials, And Strictly Control The Production Process To Ensure That All Products Are In Line With International Standards Of Quality Products. We Can Provide Third-Party Quality Inspection Certificates, And We Pay Attention To The Reliability Of Product Quality And The Authenticity Of Test Results.

### Solid Bare Copper Wire Details



Technical Characteristics	CCA wire				
	Clad type				Plated type
	10H	10A	15H	15A	
Size range(mm)	0.15-8.0	0.15-8.0	0.08-8.0	0.08-8.0	0.10-6.0
Copper content (% by weight)	25-31	25-31	32-40	32-40	6-15
Tensile Strength (Mpa)	≥152	110-172	≥152	110-172	90-120
Elongation (%)	1	5	1	5	5
Conductivity (%)	62	62	64	64	62
DC resistivity (Ω.mm <sup>2</sup> /m)	0.02743	0.02743	0.02679	0.02676	0.02743
Density (g/cm <sup>3</sup> )	3.32	3.32	3.63	3.63	2.85

## Inventory & Packaging



- Safetest
- Fastest
- Cheapest



If you need any favorable or fast shipping welcome to contact us.



Wuxi Jinnuo copper Co.,Ltd



+86-17763564398



sales01@shuangheyisteel.com



copper-solid.com

32 Chengnan Road, New District, Wuxi City, Jiangsu Province, China