

china

1kg

5day

90000ton

jinshunlai

0.1mm-900mm


or customized package

Contact Us

# China Manufacturer Polished Surface Cast Bronze Bushing For Electrical Motor

### **Basic Information**

- Place of Origin:
- Brand Name:
- Certification:
- Model Number:
- Minimum Order Quantity:
- Price:
- Packaging Details:
- Delivery Time:
- Payment Terms:
- Supply Ability:

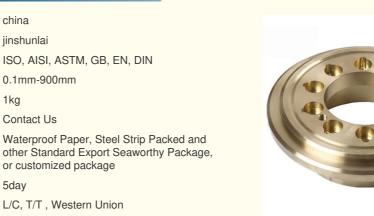

#### **Product Specification**

- Chemical Composition:
- Electrical Resistivity:
  - 0.2-0.5 μΩ·m
- Package:
- Pressure:
- Product Name:
- Size:
- Finishing:
- Type:
- Wooden Packing **High Pressure** Cast Bronze Bushing Customized
- Polished

Cu-Ni

Sliding



#### More Images



# Product Description

# Cast Bronze Bushing For Electrical Motor

| Place of Origin        | shandong, Chi   | na                      |
|------------------------|-----------------|-------------------------|
| Brand Name             | jinshunlai      |                         |
| Model Number           | FB08            |                         |
| Customized             | Surpport OEM    | Customized              |
| Product name           | Self-Lubricatin | g bearing               |
| Bush types             | bush            |                         |
| Material Composition   | Alloy copper    |                         |
| Process                | Precision CNC   | Machining               |
| Standard               | level6          |                         |
| Application            | Industrial Equi | pment                   |
| Package                | Shipping Pack   | ing                     |
|                        |                 |                         |
| Packaging and delivery | ý               |                         |
| Packaging Details      |                 | Export standard packing |

| pply Ability      |             |                               |  |
|-------------------|-------------|-------------------------------|--|
| Supply Ability    |             | 100000 Piece/Pieces per Month |  |
| tails Images      |             |                               |  |
| Performance index |             | Data                          |  |
| Max Load          | Static load | 250N/mm <sup>2</sup>          |  |
|                   |             |                               |  |
|                   |             |                               |  |
|                   |             |                               |  |
|                   |             |                               |  |
|                   |             |                               |  |
|                   |             |                               |  |